



JLG LE SERIES

- Choice of models with working heights from 12 m to 14 m*
- Deep cycle batteries for longer duty cycles
- On-board generator for quick charging of batteries**
- Proportional controls achieve smoother movement for operator comfort
- All terrain tyres
- Automatic Traction Control (ATC) for improved manoeuvrability on off-slab areas
- Optional oscillating axle and all wheel drive
- Optional levelling jacks

* Models 3369LE & M3369 – 12 m working height

* Models 4069LE & M4069 – 14 m working height

**Models M3369 & M4069

For more details check the JLG Technical Specification Guide or ask your local JLG representative.



Automatic Traction Control (ATC) for higher performance

Advanced control system ensures improved traction on uneven ground or over floor obstacles.



Easy to follow layout of controls

Console designed for ease of operation and rapid positioning control.



Multi-Power System

Models M3369 and M4069 feature an engine-powered generator that automatically recharges the batteries to help reduce downtime.



Optional levelling jacks

Hydraulic levelling jacks allow the machine chassis to be levelled on uneven ground before elevating the platform.



Oscillating axle and all wheel drive* for uneven terrain capabilities

Improves wheel contact with the ground when travelling over varying terrain.

*All wheel drive option available on models M3369 & M4069 only.



Roll out deck extension

Provides extra 0.91 m reach for access up and over obstacles.

JLGEUROPE

JLG Industries (Europe), A Division of JLG Industries, Inc.

Kilmartin Place, Tannochside Park, Uddingston, G71 5PH, Scotland.

Tel: 01698 811005

Fax: 01698 811055

www.jlg.com



ELECTRIC SCISSOR LIFTS

| | 3369LE | M3369 | 4069LE | M4069 |
|-----------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| A. Platform Height – Elevated | 10.06 m | 10.06 m | 12.19 m | 12.19 m |
| B. Platform Height – Lowered | 1.66 m | 1.66 m | 1.73 m | 1.73 m |
| C. Platform Railing Height ¹ | 1.10 m | 1.10 m | 1.10 m | 1.10 m |
| D. Stowed Height (Rails Folded) | 1.94 m | 1.94 m | 2.01 m | 2.01 m |
| E. Platform Size | 1.65 m x 2.92 m | 1.65 m x 2.92 m | 1.65 m x 2.92 m | 1.65 m x 2.92 m |
| F. Deck Extension | 0.91 m | 0.91 m | 0.91 m | 0.91 m |
| G. Overall Width | 1.75 m | 1.75 m | 1.75 m | 1.75 m |
| H. Overall Length ² | 3.10 m | 3.10 m | 3.10 m | 3.10 m |
| I. Wheelbase | 2.30 m | 2.30 m | 2.30 m | 2.30 m |
| J. Ground Clearance | 0.20 m | 0.20 m | 0.20 m | 0.20 m |
| Platform Capacity | 450 kg | 450 kg | 360 kg | 360 kg |
| Capacity on Deck Extension | 120 kg | 120 kg | 120 kg | 120 kg |
| Lift/Lower Time | 38/42 sec. | 38/42 sec. | 54/50 sec. | 54/50 sec. |
| Maximum Drive Height | 10.06 m | 10.06 m | 9.14 m | 9.14 m |
| Gross Vehicle Weight ¹ | 4,600 kg | 5,000 kg | 5,300 kg | 5,700 kg |
| Drive Speed – Lowered | 5.6 km/h | 5.6 km/h | 5.6 km/h | 5.6 km/h |
| Drive Speed – Elevated | 0.6 km/h | 0.6 km/h | 0.6 km/h | 0.6 km/h |
| Gradeability | 35% | 35% | 35% | 35% |
| Turning Radius – Inside | 2.30 m | 2.30 m | 2.30 m | 2.30 m |
| Turning Radius – Outside | 3.81 m | 3.81 m | 3.81 m | 3.81 m |
| Tyres (non-marking) | 240/55-17.5 | 240/55-17.5 | 240/55-17.5 | 240/55-17.5 |
| Brakes | Automatic Spring Applied | Automatic Spring Applied | Automatic Spring Applied | Automatic Spring Applied |
| Drive Motors | Dual Electric Traction | Dual Electric Traction | Dual Electric Traction | Dual Electric Traction |
| Hydraulic Pump Motor | Perm. Magnet | Perm. Magnet | Perm. Magnet | Perm. Magnet |
| Batteries | 8 x 6V 370 A/hr | 8 x 6V 370 A/hr | 8 x 6V 370 A/hr | 8 x 6V 370 A/hr |
| Charger (120/240V - 50/60HZ) | 23 Amp SCR Automatic | 23 Amp SCR Automatic | 23 Amp SCR Automatic | 23 Amp SCR Automatic |
| Hydraulic Pump | Gear Pump | Gear Pump | Gear Pump | Gear Pump |
| Hydraulic Reservoir | 32.18 L | 32.18 L | 32.18 L | 32.18 L |
| Generator Set | — | Yanmar Air-Cooled 4.5 kW | — | Yanmar Air-Cooled 4.5 kW |
| Generator Fuel Tank | — | 15.2 L | — | 15.2 L |



¹ Certain weights and dimensions may vary due to options and to compliance with country standards.

² Overall length with optional leveling jacks is 3.81 m.

Specifications may change to meet country standards or with the addition of optional equipment.



JLG MODELS 3369LE & M3369

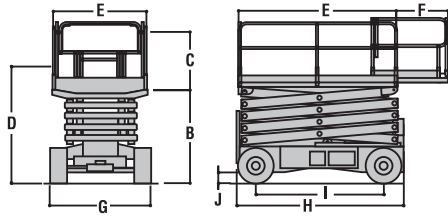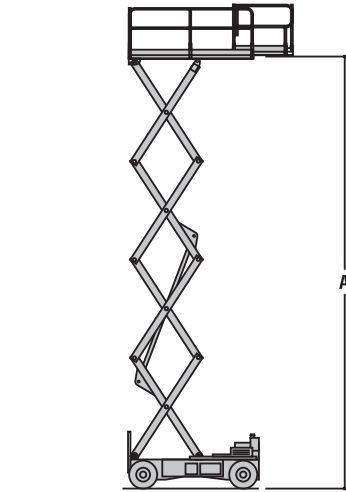

JLG MODELS 4069LE & M4069

